



NOTES:

1. INSTALL & MAINTAIN 4' TALL WOODEN SLAT OR CHAIN LINK METAL FENCE SECURED TO METAL POSTS SPACED A MAXIMUM DISTANCE OF 6' APART.
2. CHAIN LINK FENCE TO HAVE POSTS SECURED AT EACH SECTION TO MAINTAIN AN UPRIGHT AND STATIONARY POSITION THROUGHOUT CONSTRUCTION.
3. FAILURE TO INSTALL AND MAINTAIN PROTECTIVE TREE FENCING IN ACCORDANCE WITH VILLAGE STANDARDS WILL RESULT IN THE ISSUANCE OF A STOP WORK ORDER ON THE PROJECT.

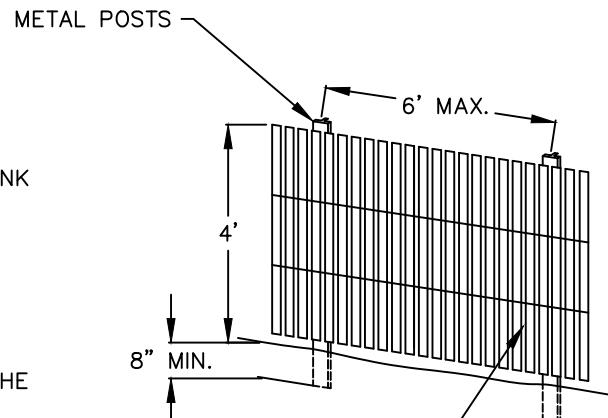

WOOD SLAT FENCE DETAIL

THE DISTANCE FROM FACE OF TRUNK TO THE FENCE SHALL BE EQUAL TO ONE (1) FOOT FOR EVERY INCH OF TREE DIAMETER AS MEASURED 4.5' FROM THE GROUND UNLESS OTHERWISE NOTED ON APPROVED PLANS.

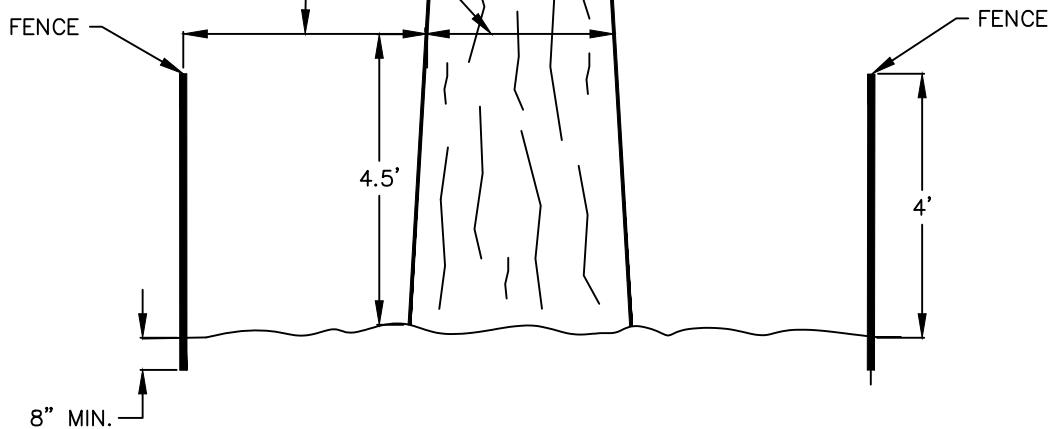

WOODEN SLAT OR CHAIN LINK TREE PROTECTION DETAIL



northbrook
Public Works Department

DATE

4-30-20 Revised Notes

4-1-21 Added Plan Note

REVISIONS

STANDARD DETAIL
G-3 (02)